




**WHERE
PRECISION
DRIVES
PRODUCTION**

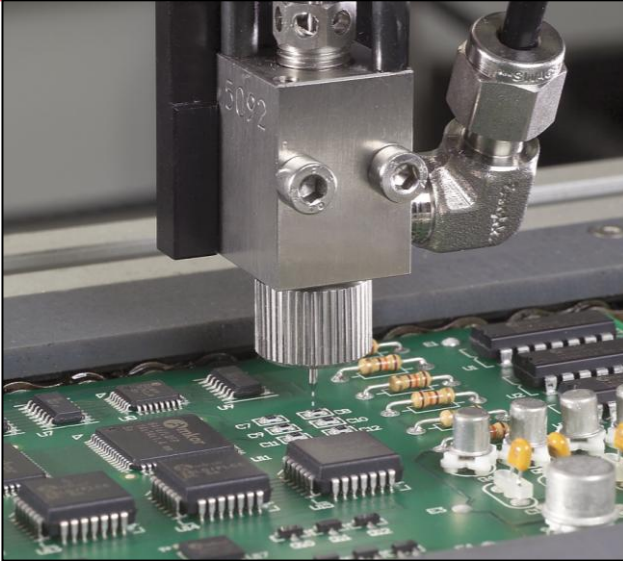

VALVE SPECIFICATIONS

Dimensions

152 mm x 19 mm x 19 mm
(6.00" x 0.75" x 0.75")

Minimum Shot Size

0.83 μ l

Minimum Line Width

0.25 mm (0.010")

Minimum Orifice Inside Diameter

0.08 mm (0.003")

Viscosity Range

1 cps – 20,000 cps

Operating Air Pressure

60 – 100 psi

Operating Fluid Pressure

1-100 psi

Wetted Components

Stainless steel, Teflon[®], Kalrez[®]

FCM100 NON-CONTACT MICRO DISPENSING VALVE

The FCM100 is ideal for any low viscosity underfill, encapsulant, conformal coating, and micro dot or bead dispensing project. The FCM100 "propels" precise shots of fluid onto a substrate resulting in accurate patterns at a high robot speed as no in process z-axis adjustments are required. The FCM100 is compatible with all PVA automated platforms.

The FCM100 has many integrated features including:

- ▲ Interchangeable 22, 25, 27, 28, 30, 32, and 33 gauge tip designs for various dispensing profiles
- ▲ Micrometer flow adjustment with lock ring
- ▲ inMOTION™ dispensing with no z-axis motion needed
- ▲ Highly repeatable dot size results in superior pattern definition
- ▲ Dot and continuous line dispensing profile capability
- ▲ Divorced valve design prevents material contamination of the air body

For more information, please contact PVA at info@pva.net or 1-518-371-2684.

The FCM100 micro dispensing valve is available in the following configurations:

FCM100-22G

Non-contact Micro Dispensing Valve with 22g tip

FCM100-25G

Non-contact Micro Dispensing Valve with 25g tip

FCM100-27G

Non-contact Micro Dispensing Valve with 27g tip

FCM100-28G

Non-contact Micro Dispensing Valve with 28g tip

FCM100-30G

Non-contact Micro Dispensing Valve with 30g tip

FCM100-32G

Non-contact Micro Dispensing Valve with 32g tip

FCM100-33G

Non-contact Micro Dispensing Valve with 33g tip



One Mustang Drive
Cohoes NY 12047
tel 518 371 2684
fx 518 371 2688
www.pva.net

FCM100 Mounting Dimensions

